




# Elo & Kitchen Armor

## All-In-One

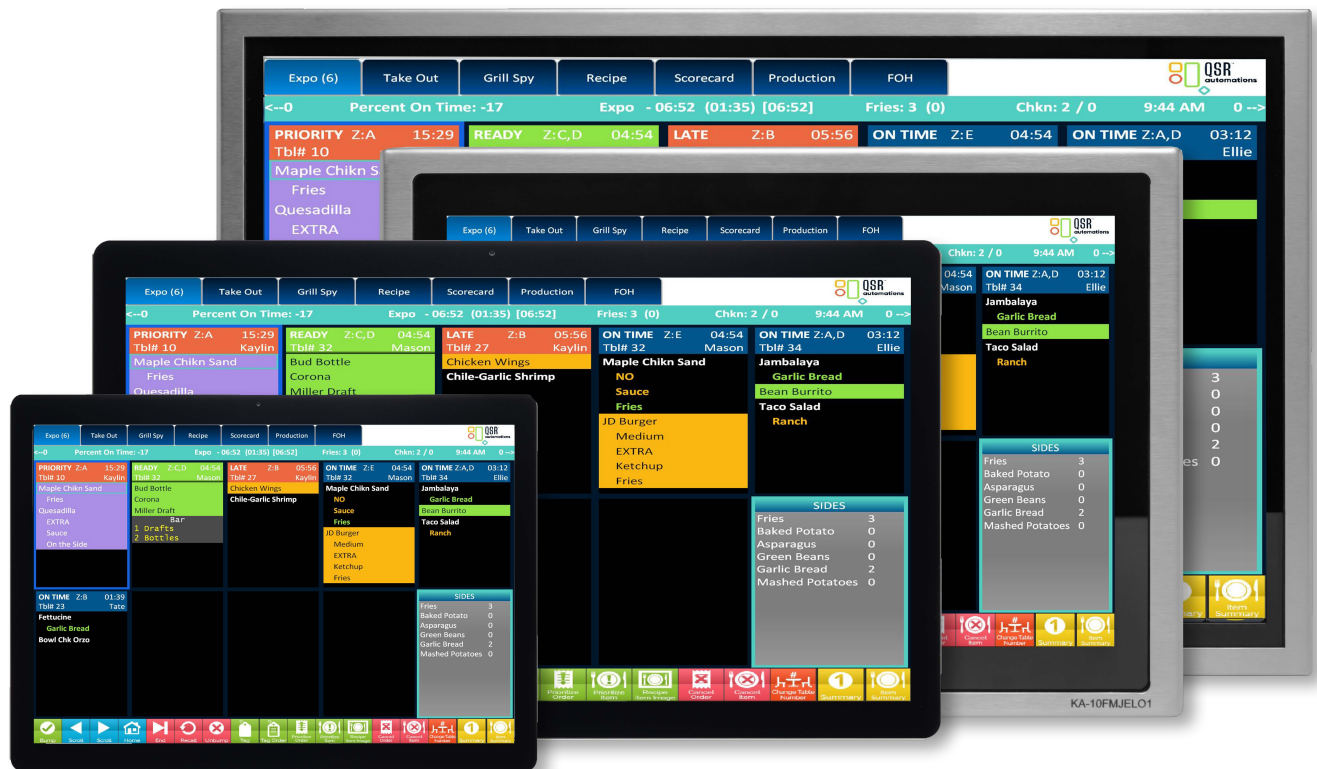

10" | 15" | 22"


15.6" | 21.5"

# Elo 10" All-in-One




FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip RK3399
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 support (900mA), Type C USB output, Micro SD slot, GPIO
Speakers	Two 2W stereo internal
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 250 nits, LCD Panel: 300 nits
Response Time	25 ms
Contrast Ratio	800:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	9.96" x 6.65" x 0.87" (252.9mm x 169.0mm x 22.1mm)
Weight	4.9 lbs (2.2 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2-year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

# Elo 15" All-in-One

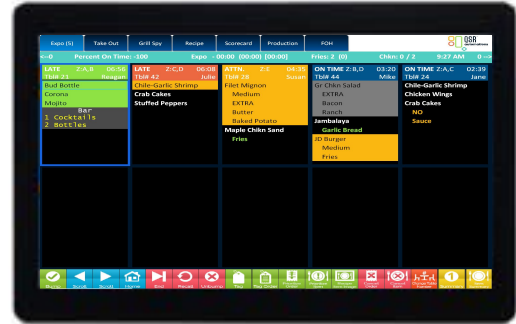


FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip RK3399
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 support (900mA), Type C USB output, Micro SD slot, GPIO
Speakers	Two 2W stereo internal
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 250 nits, LCD Panel: 300 nits
Response Time	25 ms
Contrast Ratio	800:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	15.23" x 9.77" x 1.11" (386.74mm x 248.17mm x 28.3mm)
Weight	Unpackaged: 3.5 lbs (1.59 kg) Packaged: 7.20 lbs (3.27 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2 -year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

# Elo 22" All-in-One

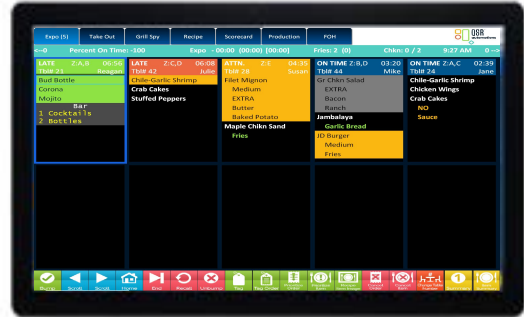


FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip OK3399
Memory	4GB
Storage	32GB SSD
Speakers	Two 2W stereo internal
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), Type C USB output, Micro SD slot, GPIO
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 300 nits
Response Time	5 ms
Contrast Ratio	1000:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	20.66" x 12.79" x 1.17" (524.8mm x 324.8mm x 29.7mm)
Weight	9.5 lbs (4.3 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2-year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

# Elo 15" Windows All-in-One

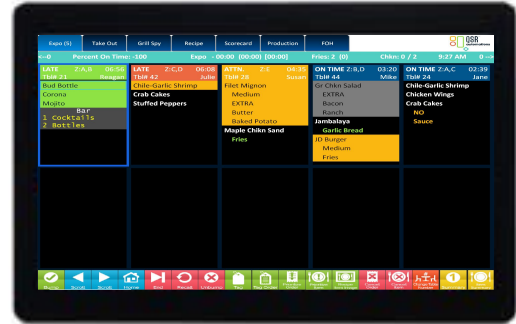


FEATURE	SPECIFICATION
Operating System	Windows 10 IoT
Processor	Intel® Celeron® J4125 Processor (4M Cache, up to 2.7 GHz)
Memory	Celeron: 4GB 2666MHz DDR4 SO-DIMM on 1 of 2 slots (Expandable to 8GB maximum on 2 slots)
Storage	128GB M.2 SATA SSD 72 TBW
I/O Ports	1 x LAN RJ45 (Gigabit), 1 x USB 3.0, 4 x Micro USB 2.0 on edges for optional Elo Edge Connect peripherals
Speakers	2 x 2W internal speakers
Wireless	Wi-Fi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Brightness	LCD panel: 300 nits; TouchPro PCAP: 270 nits
Response Time	25 msec
Contrast Ratio	700:1
Power	External USB-C power supply brick, AC input voltage: 100-240 VAC, Input frequency: 50-60 Hz
Aspect Ratio	16:9
Dimensions (W x D x H)	15.13" x 9.7" x 1.72"
Weight	Packaged: 9.5 lbs / 4.3 kg Unpackaged: 4.9 lbs / 2.2 kg
Temperature	Operating: 0°C to 35°C / 32°F to 95°F; Storage: -20°C to 60°C / -4°F to 140°F
Mounting Options	75mm VESA mount
Warranty	3-year
Regulatory Approvals	UL/cUL, FCC, TUV, CE, CB, UKCA, Mexico NOM, C-Tick/RCM, VCCI, Argentina S-Mark, CCC

# Elo 22" Windows All-in-One

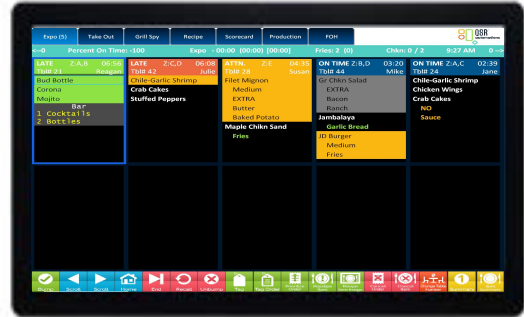


FEATURE	SPECIFICATION
Operating System	Windows 10 IoT
Processor	Intel® Celeron® J4125 Processor (4M Cache, up to 2.7 GHz)
Memory	Celeron: 4GB 2666MHz DDR4 SO-DIMM on 1 of 2 slots (Expandable to 8GB maximum on 2 slots)
Storage	128GB M.2 SATA SSD 72 TBW
Speakers	2 x 2W internal speakers
I/O Ports	1 x LAN RJ45 (Gigabit), 1 x USB 3.0, 4 x Micro USB 2.0 on edges for optional Elo Edge Connect peripherals
Wireless	Wi-Fi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Brightness	LCD panel: 250 nits; TouchPro PCAP: 225 nits
Response Time	14 msec
Contrast Ratio	1000:1
Power	External USB-C power supply brick, AC input voltage: 100-240 VAC, Input frequency: 50-60 Hz
Aspect Ratio	16:9
Dimensions (W x D x H)	20.7" x 12.57" x 2.07"
Weight	Packaged: 15.4 lbs / 7 kg Unpackaged: 11.5 lbs / 5.2 kg
Temperature	Operating: 0°C to 35°C / 32°F to 95°F; Storage: -20°C to 60°C / -4°F to 140°F
Mounting Options	75mm or 100mm VESA mount
Warranty	3-year
Regulatory Approvals	UL/cUL, FCC, TUV, CE, CB, UKCA, Mexico NOM, C-Tick/RCM, VCCI, Argentina S-Mark, CCC

# Kitchen Armor 15.6" All-in-One

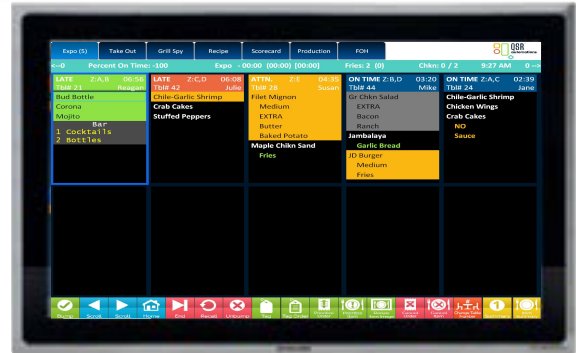

FEATURE	SPECIFICATION
Material	2 mm strengthen glass
Active Display Area	13.55" x 7.62" / 344.16 mm x 193.59 mm
Diagonal	15.6"
Aspect Ratio	16:9
Dimensions	15.44" x 9.63" x 1.63" / 392.18 mm x 244.60 mm x 41.40 mm
Weight	8.45 lbs / 3.83 kgs
Native Resolution	1920 x 1080 at 60Hz
Color Depth	262 K
Touch	Technology: PCAP   Resolution: 4096 x 4096   # of Touches: 10-Touch   Accuracy: 2mm   Response Time: 10 msec
Input Method	Finger, Touch Pen, Gloved Hand
CPU	Rk3288
Memory	2G
Storage	8G
Operating system	Android 10
Networking	10/100 Ethernet LAN
Brightness (typical)	215 nits
Response (typical)	30 msec
Viewing Angle	Horizontal: 85 or 170 total; Vertical: 85 or 170 total
Contrast Ratio	800:1
Light Transmission	86%
Power Supply	POE+ / External 12V DC Power Adapter
Temperature	Operating: 0°C to 40°C (32°F to 104°F); Storage: -20°C to 60°C (-4°F to 140°F)
Humidity	Operating: 20% to 80%; Storage: 10% to 90%
Mounting Options	100 mm VESA mount
IP	IP 65
Certifications	CE, FCC
Warranty	1 year

# Kitchen Armor 21.5" All-in-One

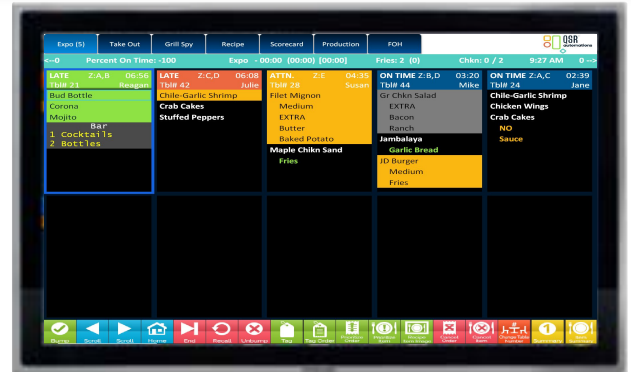

FEATURE	SPECIFICATION
Material	Stainless Steel, 3.0mm strengthen glass
Active Display Area	18.77" x 10.56" / 476.64mm x 268.11 mm
Diagonal	21.5"
Aspect Ratio	16:9
Dimensions	20.83" x 12.6" x 1.94" / 529mm x 320mm x 49.2mm
Weight	16.3 lbs / 7.39 kgs
Native Resolution	1920 x 1080 at 60Hz
Color Depth	16.7 million
Touch	Technology: PCAP   Resolution: 4096 x 4096   # of Touches: 10-Touch   Accuracy: 2mm   Response Time: 10 msec
Input Method	Finger, Touch Pen, Gloved Hand
CPU	RK3399
Memory	4G
Storage	16G
Operating system	Android 10
Networking	10/100 Ethernet LAN
Brightness (typical)	250 nits
Response (typical)	10 msec
Viewing Angle	Horizontal: 89 or 178 total; Vertical: 89 or 178 total
Contrast Ratio	3000:1
Light Transmission	86%
Power Supply	POE+ / External 12V DC Power Adapter
Temperature	Operating: 0°C to 40°C (32°F to 104°F); Storage: -20°C to 60°C (-4°F to 140°F)
Humidity	Operating: 20% to 80%; Storage: 10% to 90%
Mounting Options	100 mm VESA mount
IP	IP 65 Front Side, IP67 Industrial RJ45 jack available (POE only)
Certifications	CE, FCC
Warranty	1 year